

# UNIVERSAL CRUSH TESTER 17-60



## FEATURES

- Measuring range 1000 LB (0-5000 N)
- Test speed 0.2-2.0 in/min (5-50 mm/min)
- Return speed 4.0 in/min ( $\pm 100$  mm/min)
- Menu-driven software
- Test results and statistics are displayed on a large high contrast LCD screen
- Preset keys for all relevant tests
- Automatic fast return platen saves testing time
- Multi-language programmed- 7 languages
- 8 Corrugated Test Methods for quick access
- Measuring units include: N/m, lb/in, kPa, lb/in<sup>2</sup> or lb/ft
- RS232C serial data output
- Printer output
- Key lock prevents accidental or unauthorized resetting

Designed in close cooperation with industry, the Universal Crush Tester is rugged enough for any production testing environment. Microprocessor control and operator friendly software makes the Model 17-60 simple to operate. Ergonomic control layout maximizes testing speed while minimizing sample testing errors resulting in incorrect data. The instrument meets or exceeds all current and projected standards for accuracy, precision, and parallelism.

System Software includes 8 Corrugated Test Methods for quick access including: RCT, CCT, ECT, CMT, FCT, PAT, CLT and SQT- score test which calculates Score Ratio of scored verses unscored samples.

## APPLICATIONS

Corrugated  
Tubes and Cores  
Flexible Packaging  
Plastic Products  
Building Products

## OPTIONAL ACCESSORIES


Sample holders for RCT, CCT, ECT and SQT  
Model 22-47 Sample Cutter  
Model 22-22 Sample Cutter  
Printer

# UNIVERSAL CRUSH TESTER 17-60


## OPTIONAL ACCESSORIES



▲ RCT- Ring Crush holder with disks 17-11-13

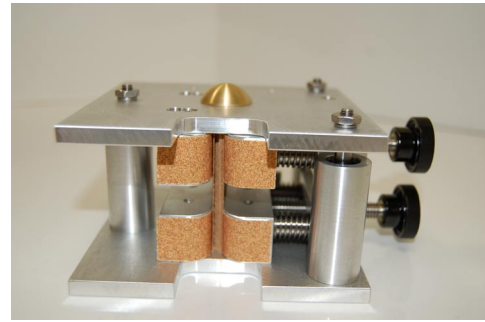

▲ Edge Crush Tester 17-11-49

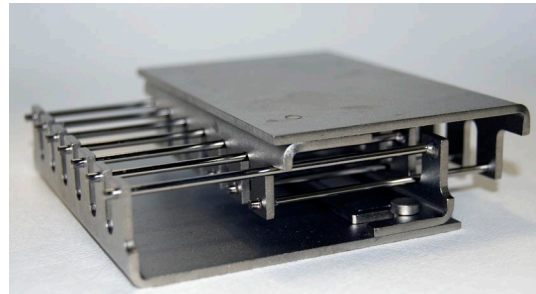

▲ PAT-Pin Adhesion Attachment 17-11-09

### INSTRUMENT MEETS

RCT test	APPITA/AS 1301.407s, DIN 53134, ISO 12192, SCAN P34, TAPPI T 822
CMT test	APPITA/AS 1301.434s, ISO 7263, DIN 53134, SCAN P27, TAPPI T809
CCT test	SCAN P42, TAPPI T 843
PAT test	APPITA/AS 1301.430s, TAPPI T 821, FEFCO No. 11
ECT test	APPITA/AS 1301.444s, ISO 3037, ISO 13821, DIN 53149, SCAN P33, TAPPI T 811, TAPPI T 823, TAPPI T 838, TAPPI T 839, FEFCO No. 8
FCT test	PPITA/AS 1301.429s, EN 23035, ISO 3035, SCAN P32, TAPPI T 825, FEFCO No. 6
ASQT test	TAPPI T 829

# UNIVERSAL CRUSH TESTER 17-60

## SPECIFICATIONS

<b>Model</b>	17-60-00-0001
<b>Ranges</b>	
Measuring range	0 – 1124 lb (0 - 5000 Newton)
Accuracy	± 1% of reading
Stroke length	3.03 in (77 mm)
Measuring units	N - lb - N/m – lb/in - kPa -Lb/foot – lb/in <sup>2</sup>

### Speed

Test Speed	0.2 – 2.00 in/min (5-50 mm/min)
Return Speed	± 4.00 in/min (± 100 mm/min)

### Platen Size

Upper platen	4.92 x 4.92 in (12.5 x 12.5 cm) with 2.75 in (7 cm) opening
Lower platen	7.08 x 4.92 in (18 x 12.5 cm)

### Statistics Display

•Number of tests	•Standard deviation
•Number of tests deleted	•Variation coefficient
•Highest value	•CCT Index (in case of CCT tests)
•Lowest value	•Max. number of tests : 100 (in one test series)
•Mean value	

### Machine Requirements

Power	230V/50Hz or 120V/60Hz
Safety Features	Overload protection: Electronically at 100% of measuring range during test. Overload protection: 100 N during travel upwards lower platen
Connections	RS232C output, Serial printer output
Internal languages	English - Dutch - German - French Spanish - Finnish – Italian (special languages on request)

### Physical Specifications

W x D x H	14.5 in x 15.7 in x 28 in (37 cm x 40 cm x 71 cm)
Weight	152 lbs (69 kg)

### Standards

ISO 13820	Paper, board and corrugated fibreboard -- Description and calibration of compression-testing equipment
APPITA/AS 1301.449s	Description of crush testing equipment

#### Main Headquarters

<b>Testing Machines Inc.</b> 40 McCullough Drive New Castle, DE 19720 Tel: (302) 613-5600 Fax: (302) 613-5619 Info@testingmachines.com	<b>Messmer Instruments</b> Unit F1 Imperial Business Estate West Mill, Gravesend Kent DA11 0DL UK Tel: +44 (0) 1474 566488 Fax: +44 (0) 1474 560310	<b>Büchel BV</b> Fokkerstrat 24, 3905 KV Veenendaal, Netherlands Tel: +33 (0)318 521500 Fax: +33 (0)318 5400358	<b>Lako Tool and Manufacturing Inc.</b> 7400 Ponderosa Road Perrysburg, Ohio 43552 Tel: (419) 662-5256 Fax: (419) 662-8225	<b>Lawson Hemphill</b> 1658 G A R Highway Swansea, MA 02777 Tel: (508) 679-5364 Fax: (508) 679-5396 Information@ lawsonhemphill.com	<b>Adamel Lhomargy SARL</b> Z.A. de l'Habitat, Bâtiment 6 Route d'Ozoir, 77680 Roissy en Brie, France Tel: +33 (0) 1 6440291 Fax: +33 (0) 1 64409211	<b>TMI Canada</b> P.O. Box 203 Pointe-Claire Dorval QC, H9R-4N9 CAN Tel: (514) 426-5855 Fax: (514) 426-1557
---	---	---	--	---	--	--

